




DUTCHMAN®

Martinus Van Breems, Inc.

54A Beach Road, Norwalk, CT 06855

Tel. 203-838-0375 Fax 203-838-0377

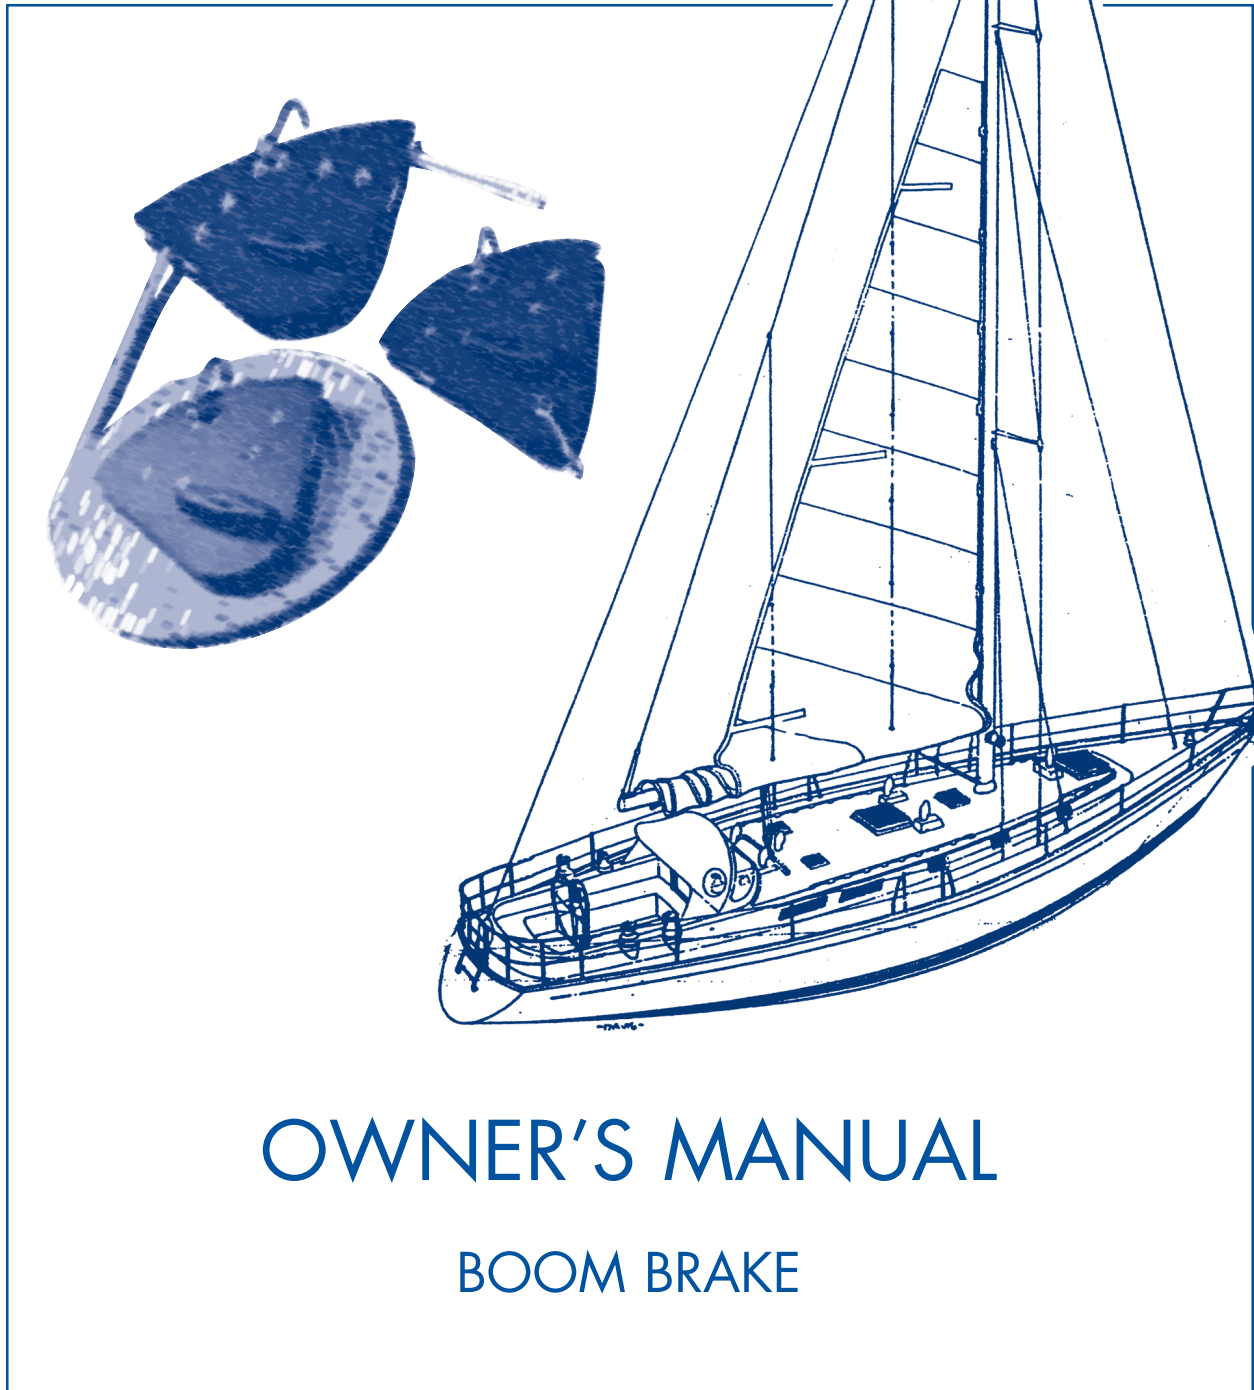

OWNER'S MANUAL

BOOM BRAKE



DUTCHMAN®

Boom Brake Owner's Manual Introduction


The Dutchman Boom Brake is simple, reliable device to regulate the boom speed. How well the Brake will work depends on proper installation. You also will have set the tension correctly for different wind speeds. Please follow these instructions carefully.

Thank you for your purchase of a Dutchman Boom Brake. We work hard to produce high quality, effective products, and provide excellent customer service. We're here to help you. Call, fax, or contact Martin van Breems. Let us know if you are not totally happy. Bear in mind that we guarantee your satisfaction with our products. See our guarantee for more details. Finally, we know many of our sales come from customer recommendations, for which we thank you very much.

Pre Installation Checklist

You will need the following tools and parts.

- Needle nosed pliers and/or a marlin spike, regular pliers.
- A thin, long blade slotted screwdriver.
- Indelible ink marker.
- Tools and parts to mount brake to boom (typ; bail, supplied bushings, bolt, drill and bits).
- Tools and parts to attach brake line to deck / run back to cockpit (typ; turning block, fairleads).
- Hardware to adjust tension on brake line (winch or block & tackle).

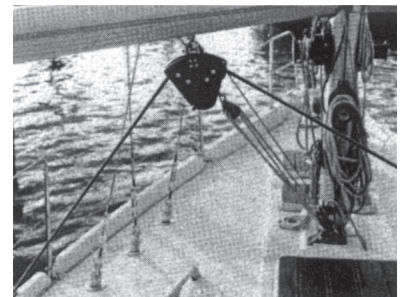

Properly installed and used, the brake will allow you to safely and easily control the boom entirely from the cockpit.

Table of Contents

Subject	Page
Introduction	1
Specifications	2
Installing the Boom Brake	3
Locate Deck Attachment Points	3
Locate Boom Attachment Point	3
Check Line Tension	4
Mounting Tips, Deck Attachment	4
Mounting Tips, Boom Attachment	6
Rigging the Brake, Brake Line Adjustable	6
Rigging the Brake, Brake Line Fixed	7
Testing the Installation	7
Operation	8
MOB Info	8
Legal Information and Warranty	9

Specifications

These specifications are for conventional, moderate displacement monohulls, and are provided as a rough indication of which Boom Brake and installation kit should be used. Heavy displacement sailboats or sailboats which will be undertaking extensive offshore passages must use oversized equipment. Use the next size larger installation kit to start off. Contact us for more information.

Boom Brake Specifications

Model	Typl Boat Size	Max Mainsail area	Safe Working Load
BB250	20 - 32' / 6 - 10m	250 sq ft / 23m	1,600 lbs / 700 kg
BB250B	20 - 32' / 6 - 10m	250 sq ft / 23m	1,600 lbs / 700 kg
BB500	30 - 45' / 9 - 14m	500 sq ft / 45m	2,700 lbs / 1,200 kg
BB500B	30 - 45' / 9 - 14m	500 sq ft / 45m	2,700 lbs / 1,200 kg
BB750	42 - 60' / 13 - 19m	750 sq ft / 68m	4,100 lbs / 1,800 kg
BB750B	42 - 60' / 13 - 19m	750 sq ft / 68m	4,100 lbs / 1,800 kg

The **BB250**, **BB500** and **BB750** are used with rigid vang, where they are fitted just behind the rigid vang, or in a soft vang application with 2 attachment points (bails) on the boom. They would also be used if you don't have a vang. The **BB250B**, **BB500B** and **BB750B** have an additional shackle secured to the bottom of the brake. They are used on boats with 'soft' (block and tackle) vangs. The brake is attached to the vang bail on the boom, while the vang is shackled to the bottom of the brake.

Line / Hardware Specifications

Brake	Boat	Mainsail Area	SWL	Model	Line Dia - Length
250	20-28' / 6-8m	200 sq ft / 18m	1,200 / 500 kg	IK200	1/4" - 36' / 6mm - 11m
250	26-32' / 8-10m	280 sq ft / 25m	1,600 / 700 kg	IK280	5/16" - 40' / 8mm - 12m
500	30-38' / 9-11m	390 sq ft / 35m	2,250 / 1,000 kg	IK390	3/8" - 44' / 10mm - 13m
500	35-45' / 11-14m	500 sq ft / 45m	2,700 / 1,200 kg	IK500	7/16" - 50' / 11mm - 15m
750	42-52' / 13-16m	620 sq ft / 56m	3,500 / 1,600 kg	IK620	1/2" - 60' / 13mm - 18m
750	48-60' / 15-18m	750 sq ft / 68m	4,100 / 1,800 kg	IK750	5/8" - 75' / 16mm - 23m

These specifications give the minimum SWL's (safe working loads) for the mounting hardware and the line diameter and length to run the line back to the cockpit. Any parts you supply or use should follow these SWL recommendations. These specifications are provided as a starting point. You may need to go up one size, depending on what kind of use you are planning, and if the attachment points are farther inboard than normal.



Pictured are our **BB750**, top, **BB500**, left, and **BB500B**, right. The **500 Series** is used on boats 26' to 45' with mains to 500 square feet. The **750 Series** is used on boats 42' to 65' with mains to 750 square feet.

Installing the Boom Brake

How well the Brake works is determined by the installation. Read these instructions carefully. First, identify the best possible locations for the deck attachment point, then the boom attachment point. Do not install any hardware until you are certain of BOTH the boom and deck attachment points.


Locate Deck Attachment Points

Use the following criteria to select the ideal location for the deck attachment points.

1. As far outboards from the mast as possible.
2. Within one foot / 30 cm fore or aft of the farthest aft (shroud) chainplate (closer is better).
3. Clear of walkways if possible.

The most common locations, in order of preference, are:

- A. The aft lower chainplates if they are set inboards. We will discuss an easy way to attach items to the chainplates later on. Normally the best location.
- B. A car on an inboard genoa track if it extends to the chainplates.
- C. A pad eye through bolted to the deck.
- D. A pad eye at the corner of the cabinhouse, if a high cabinhouse with narrow decks like on Valiants, Pacific Seacrafts, or Island Packets.
- E. An attachment point on the toerail, or midships cleat.

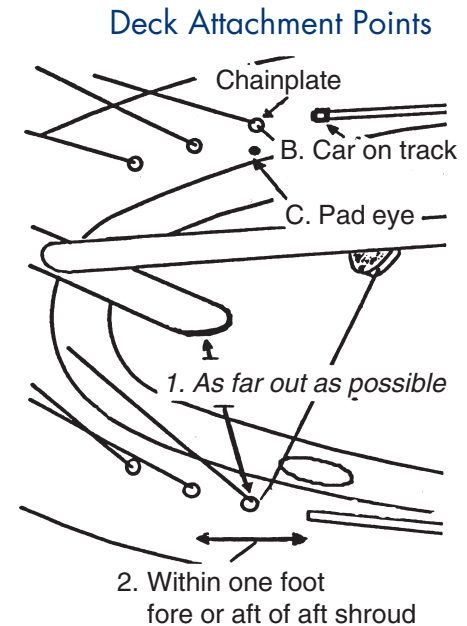


A Brake line secured to the toerail will cause a hazard when walking forward. Some owners add a shackle so that the ends can easily be disconnected when the Brake is not needed, although the Brake is handy in many situations. To prevent damage to an aluminum toerail from a shackle, consider Winchard's" special toerail shackle. Higher aluminum toerails will deform if too much side force is applied. We noticeably bent a 2" high toerail on a 38' boat with a 400 square foot main in about 20 knots of wind. (We now have our own test boats!)

Most boats have several possible attachment points. Try to locate several possibilities, then move on to locating the boom attachment point. Again, don't install anything yet. We'll deal with that later.

Locate Boom Attachment Point

Next, determine where the Brake will be attached to the boom. The brake will be about 1/4 to 1/3 the boom length back from the mast. More precisely, the brake will be about the same distance from the mast as the deck attachment point is from the mast. Use the existing boom vang attachment point or bail as a starting point. If the boat is fitted with a rigid vang, the Brake should be aft of the vang.

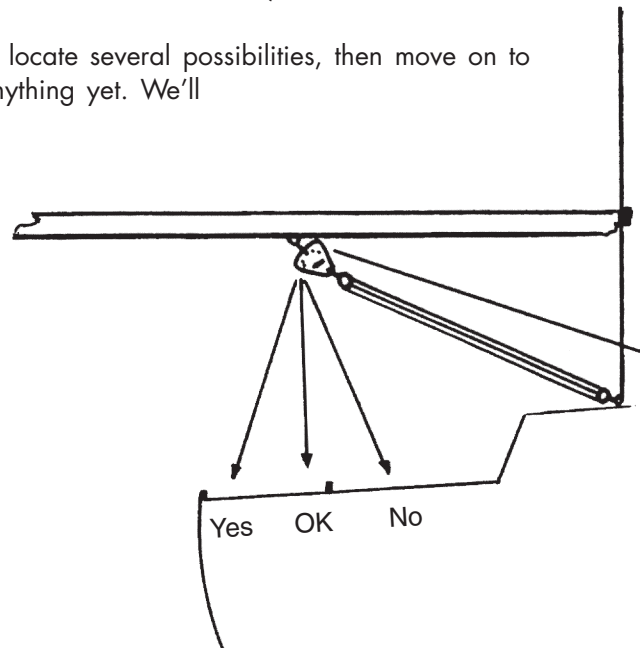

Check Line Tension

Set the boom height to the lowest normal sailing position and snug up the vang. Locate the boom on the centerline. Temporarily run a line through a block or a shackle temporarily secured to the boom attachment point. Tie or tape the block or shackle to the boom if needed. Then run the line down to the potential deck attachment points. Snug up the line and secure it with tape to the deck if needed.

Now swing the boom out, and observe the tension on the line. The line tension should not change significantly as the boom swings through its arc. If the tension does not change more than 1 to 2 inches, you will be able to jibe without touching the main sheet, as the tension on the line will be constant. As a rough guide, the tension should not change more than 4" for the 250 series, 6" for the 500 series, and 9" for the 750 series. The line should become tighter as the boom moves towards the centerline.

In general, by moving the boom attachment point back or the deck attachment point outboards, you will make the line tighter as it approaches the centerline. It may take a few try's to find the best combination.

You may find that, if you have any kind of a cabinhouse, the Brake will rub against it or the handrails at some point. This is often unavoidable. Bear in mind that the Brake slides along the line and the line itself does not move significantly. The line will not cause significant chafe, depending on the angle and contact material. Install stainless steel or bronze chafe strips along the contact area if needed, particularly if the line is rubbing against a teak handrail. Once you have determined the best mounting locations for the boom and deck attachment points, move on to the next section.


Mounting Tips, Deck Attachment

It is essential to follow the load recommendations given in the specifications section. **You must ascertain the safe working load of any piece of hardware that you install or use.** The failure of any part connecting or tensioning the brake line could have dire consequences.


If you will be tensioning the brake by a line running to the cockpit from the mast, both ends of the brake line will be secured at the deck attachment point. You will not need to mount a turning block.

Chainplates We like using the chainplates, since it's one attachment point you can be pretty sure of, and it's exactly where the line should run to on most boats. Never attach the brake line to anything higher than the lower toggle, and never attach anything so that it can pull apart a toggle or turnbuckle. File or sand off any sharp edges where the line will touch. We normally secure one end of the line to the chainplate by wrapping it around the chainplate or lowest toggle at least 3 times. One pass must go through the lower toggle, to keep the line from sliding up on the toggle or turnbuckle. Tie off the line using a splice or, temporarily, a bowline.



If you use the chainplates, you must test the chainplate for movement under load after mounting the brake. Chainplates which are thin strips of metal will bend and fatigue from any side load.

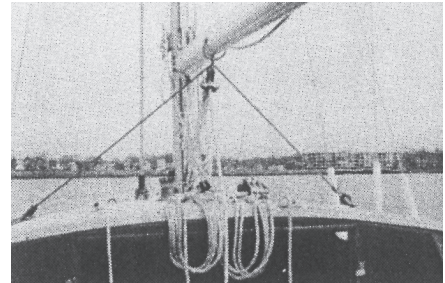

Temporarily run line

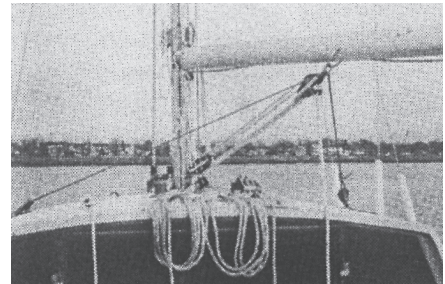

Swing boom out, check line tension

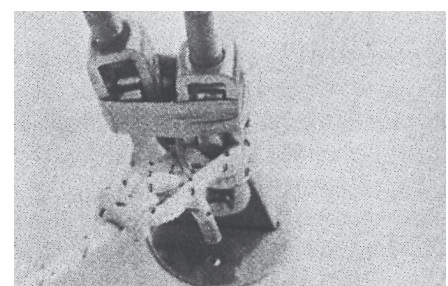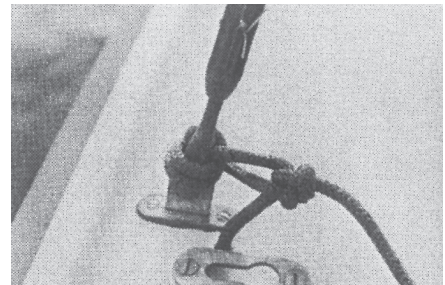

Line attached to toggle

If the line can not pass through the toggle, install an eye splice with a thimble in the end of the line. Follow the directions below to complete the installation.

To attach hardware like a block or a shackle directly to the chainplates, use lacing line, which is more reliable than a poorly aligned shackle. Adjust the number of wraps to meet the safe working loads given in the specifications. A good 1/8" / 3 mm polyester line will have a breaking strength of about 300 lbs. The safe working load is 20% of the breaking strength or 60 lbs, so 20 complete wraps of line around the chainplate and through the block or shackle would give a safe working load of 1,200 lbs. Most of the wraps must go completely around the turnbuckle toggle, but add a few more wraps through the toggle, to keep the line from riding up the toggle.



Finish up by wrapping the line around itself, to provide a cover for UV protection. By wrapping the line up to and around the shackle, after the line has been tensioned, you can help hold the block or shackle in the correct orientation.

Genoa Tracks: Genoa tracks often provide a convenient point, if they are set inboard and extend to within 12" / cm of the aft lower chainplate. Many hardware manufacturers make pad eye's that slide on a track for the fixed end of the brake line, including Schaefer, Lewmar and Harken. A genoa track block can be used on the other side to turn the line back to the cockpit.


Cabinhouse Pad Eye's: As mentioned, this is a good spot for boats with narrow decks, high cabinhouses, and outboard chainplates, as on many Island Packets, Pacific Seacrafts, and other more traditional boats. Contact the builder to ascertain if the cabinhouse is strong enough to take the brake loads. Normally the pad eye's must be installed on the Cabinhouse top, as far outboards as possible. Pad Eye's must be installed with backing plates. Use a spring mounted stand up block on the side where the line will run back to the cockpit.

Deck Mounted Pad Eye's: An inboard deck location may be the best option for some boat where there are no genoa tracks. This makes for a good, permanent installation. Contact the builder to ascertain if the deck is strong enough to take the brake loads. Pad Eye's must be installed with backing plates. Use a spring mounted stand up block on the side where the line will run back to the cockpit.


Toerail Mounting The toerail is sometimes the only possible location, especially on boats with long booms. Bear in mind that you will have to step over the line when going forward. Fortunately, the brake eliminates one of the reasons to go forward. Again, be very careful what you attach the brake line to. Stanchion bases and midship cleats often are not strong enough.

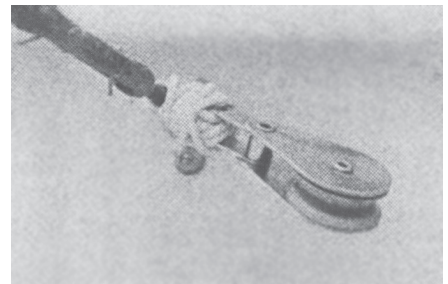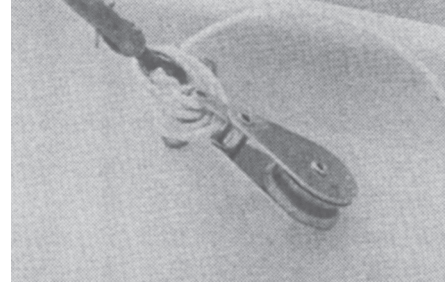

Seizing block to toggle

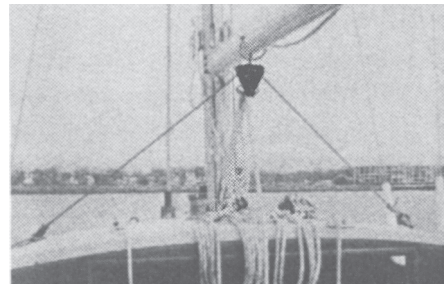

Line run to cabinhouse

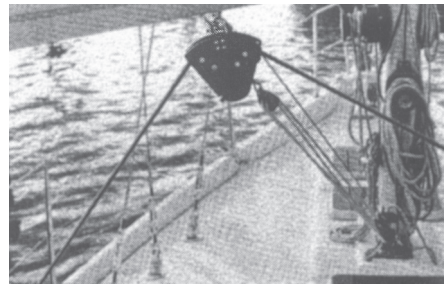


Toerail mounted brake

Pad Eye Installation


When installing pad eye's in Balsa cored fiberglass, you must use the following procedure.

1. Drill a hole the diameter of the through bolt you intend to use through only the upper layer of the deck. If you drill all the way through, tape over inside hole.
2. Bend a sturdy nail over, so the short side from the right angle is about 1/4" / 6mm long.
3. Insert long end into a drill. Remove balsa core 1/4" from edge of existing hole. Now you are ready to rig the Brake.
4. Mix some epoxy with high density filler. Epoxy should be consistency of heavy cream. Pour into holes.
5. Redrill hole for fastener, and mount using an appropriate bedding compound such as 3m 101.

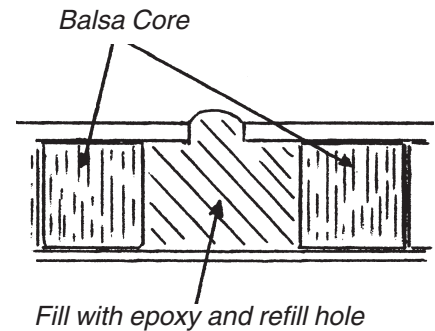

Mounting Tips, Boom Attachment

Often it's possible to use an existing boom eye or bail for mounting the brake, especially with the beckett style brake, where the brake normally attaches to the vang attachment point. Also, many modern booms have sliding bails under the boom. By removing the fasteners, a spare bail can be slide into position and refastened. Otherwise, mount a through bolted, V shaped boom bail in the appropriate position. Some booms will need reinforcing if light weight. A rectangular plate riveted to the boom should be added to strengthen the boom where the bail will be mounted, for boats planning extensive offshore passages. Contact a qualified rigger. Try to isolate the SS parts from the boom by using the supplied plastic bushings.

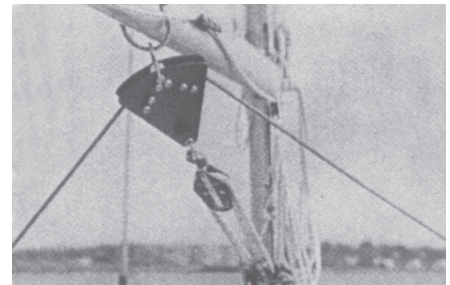


Beckett Style Brake mounted

If the brake will be tensioned by a line running back from the mast, a V shaped Bail must be used (and the longer the V, the better). You will also need another attachment point on the boom to turn the line back to the front of the mast.

Rigging the Brake Brake Line Adjustable

Once the needed attachment points are positioned, rigging the brake is simple. Attach the Brake to the boom bail. Note that the brake shackle can be front or side mounted. Wire the shackle pin to prevent it from turning. Run the line from the deck attachment point, through the Brake, and back down to the turning block.

The line should then be run aft to the cockpit. Adjust the tension on the line with a 6 to 1 block and tackle or run the line through a line stopper to a winch. If you use a 4 to 1 block and tackle, you may also need a winch to get the line tight. You will be adjusting the tension on this line to secure the boom, or allow it to jibe.

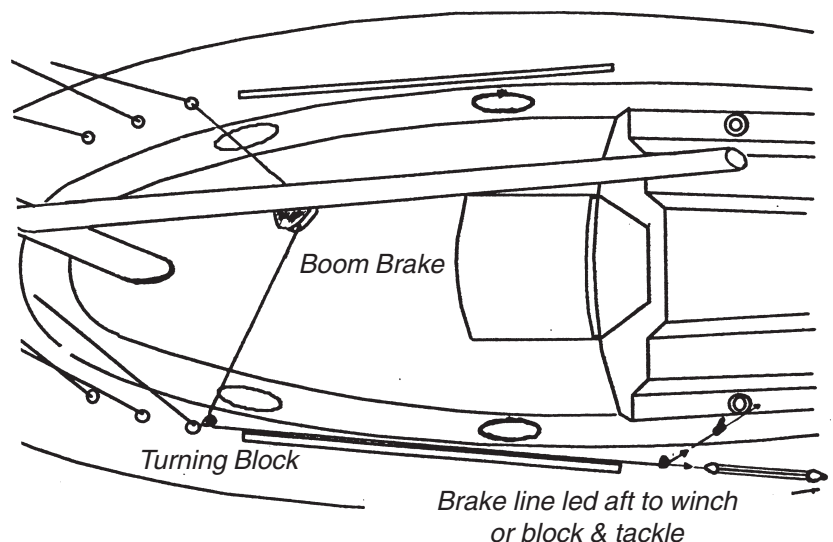


Rigging the Brake Brake Line Fixed

If you want to be able to run the adjusting line back to the cockpit from the base of the mast, you have 2 options. Either use a block and tackle to pull the bail aft to tension the brake, or use a single line run to a line stopper and a winch.

With the block and tackle method, attach a block and tackle to the bail (or the brake shackle that is also run through the bail). The other end of the block and tackle would be secured to an attachment point aft of the brake bail. The line would run from the block and tackle forward to the gooseneck, then down to the base of the mast, and aft to the cockpit to a line stopper or cleat.

With the winch method, run a single line from the bail, aft a foot or so around a block and back forward to the gooseneck, down to the base of the mast and back to the cockpit. The line will be tensioned with a line stopper and a winch.

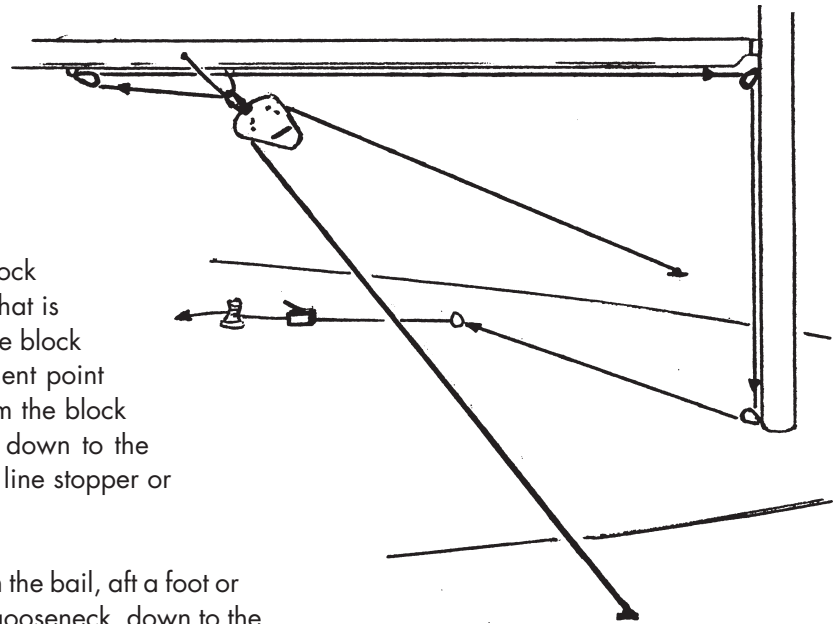

Using a single line to pull bail back


Testing the Installation

Before you head off sailing, you'll want to test your installation.

1. First, with the adjusting knob loosened by 2-3 turns, snug up the brake and push it through its arc. Make sure the line can not catch anything, and that the tension does not significantly change as the boom swings all the way through its arc from side to side. See the section **Checking the Line Tension** for more information.

2. Next, tighten the adjusting knob and brake line as tight as possible, with the boom swung all the way out. Have someone pull in the mainsheet, while you check that there is no movement of any of the hardware that shows a sign of weakness. Look for chainplates bending, or the fiberglass around the pad eye moving. Use a straightedge to check for deflection.

3. Finally, swing the boom out again, tighten everything as much as possible, and pull in on the mainsheet. It should require as much force as it takes to pull the boom in on the windiest day of sailing you are likely to encounter. If the boom can easily be pulled in, you are either not tightening the brake line enough (you need a higher ratio block and tackle), or the line diameter / brake is too small. Contact us for assistance.

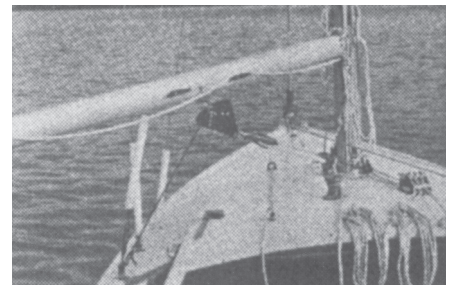

Operation

Using the Boom Brake is simple enough. Just adjust the tension on the Brake line to regulate the speed of the boom. Practice to get a feel of how this works. In light winds, you may want to let off on the adjusting knob to reduce friction. In winds over about 10 knots, the knob must be tightened. If you find that the Brake provides too much or too little friction no matter how you adjust the knob, try using a smaller diameter line (for less friction) or a larger line (for more friction). Mark the Brake line with an indelible ink marker to serve as a reference to help correctly tension the Brake line.

To jibe, you should pull the boom in using the mainsheet. Allow the brake to provide some drag to keep the boom from suddenly flying across.

The only maintenance needed is an occasional rinsing to remove salt from the line. Also check the line and other fittings periodically for wear or chafe. The Brake line should be changed regularly, due to the nature of its use. A special locking compound has been applied to the threads for the knob, to keep it from easily coming off. Do not take the knob off, or loosen it more than 3 turns. Doing so will remove some of the locking compound.

Besides serving as a preventer, you'll find other uses for the Brake. At anchor, tighten up on the Brake to keep the boom from swinging around. The Brake can also be used to hold the boom out for picking up objects (such as an outboard or a dingy) or to allow you to fit a sun awning. The brake is almost essential for offshore man overboard drills, as it prevents the boom from swinging around while you hoist the man over board out of the water. The mainsheet should be fitted with a snap shackle, so it can be used to hoist up the man over board. You can even use it to sail backwards! With the jib rolled up, the Brake tight, and the boom out at least 40 degrees, backwind the main. The boat will quickly slow down, and with experience (and the right boat), you'll be able to sail backwards.

The Brake really comes into its own for running wing and wing, in that it allows you to quickly set the boom up or switch it over for wind shifts or a new course.

Best of all the boom will always be under control, even while jibing when a preventer is disconnected and useless. We are sure you will be very pleased with it, and we look forward to hearing from you. The section below on MOB drills is taken from the Cruising Sailing course we teach at our affiliated Sailing School, Sound Sailing Center.

MOB - Quickstop Method

The Brake makes MOB recoveries quite a bit easier, as it allows you to hold the boom over the water, and use the main sheet to hoist up the MOB.

We recommend using the Quickstop method with a Lifesling, as it's easy to do with limited crew, and the heave to aspect helps quiet the boat down if you're out in any wind. You must practice this at least once on any boat you are unfamiliar with, to see how the boat heaves to, and figure out how to hoist the Lifesling up. Every boat will behave and is rigged differently. Even the same boat will heave to quite differently with a 110 or 150 up. Masthead rigs with large genoas may be hard to jibe from the hove to position. With that warning in mind, here are the general steps to follow.

1. Tack immediately. Shout MOB. Assign a spotter for the MOB if possible.
2. Let the jib or spinnaker back wind. Do not touch the sheets. You will be hove to.
3. Deploy the lifesling immediately.
4. Point so you are heading 1 boat length upwind of MOB.
5. Jibe when you pass MOB.
6. Circle MOB (tacking and jibing without touching jib sheets) till they grab float.
7. Head upwind. Roll up jib, drop main. Do not start motor. Prop should be locked.
8. Pull in Lifesling and MOB as much as possible. Secure line.
9. Assume MOB can not climb swim ladder (often they are in shock, with waterlogged clothes).
10. Attach main halyard to boom end, slacken vang / brake line and main sheet, raise boom 4-5 feet.
11. Disconnect main sheet lower block (should have a snap shackle), attach to lifesling bridle.
12. Lower lifelines, set up brake, hoist MOB back onboard.

By tacking immediately, you stay close to the victim. By hoving to, you will slow the boat down, and things will be more controlled. Don't come too close to the MOB after your tack. By practicing this with a real person, you will gain a great appreciation for how much someone weights in the water fully clothed, and how difficult it is to move around or climb the swim ladder when a boat is pitching in the waves. Add a little shock, and it's all most people can do to get into the Lifesling. Remember that the topping lift is often not sized for pulling up a MOB. Use the main halyard attached to the end of the boom. You may think you can hoist up the MOB by using the main halyard and a winch, but on most boats, this is too difficult. Finally, using the motor is a great way to kill the MOB. The motor should be OFF, with the gearshift lever in reverse to stop the prop from turning.

The Lifesling brochure talks about rigging another block and tackle to hoist the person on board, and leaving the mainsheet hooked up. We recommend using the mainsheet with a snap shackle on the lower block, since it's already there. It may not be a good idea to have people trying to find a piece of gear when there is a MOB situation. This is only our personal opinion. Practice and see what works well for you. The Boom Brake is used to keep the boom from swinging around.

Many MOB's (and probably most fatal MOB's) are the result of accidental jibes. With the brake properly installed and used, this possibility is greatly reduced. Still, it is good seamanship to practice your MOB drills. Your crew, especially if they are not experienced, will appreciate knowing there is a plan if someone goes over. Spend a few minutes as you head out running through the MOB drill, and practice it. A great time to practice it is when someone loses something over. Time yourself, and see how fast you can make it back. In our sailing school, we find that with practice, a student can get the retrieval times down from 10-15 minutes on a first attempt, to under 3 minutes after a few practices.

Legal Information and Warranty

Dutchman is a Registered Trademark of Martinus Van Breems, Inc. This Owner's Manual is Copyright 1997 by Martinus Van Breems, Inc., P.O. Box 2875 Saugatuck Station, Westport, Connecticut, 06880, U.S.A., tel 203 838 0375. Fax 203 838 0377 Martinus Van Breems, Inc. reserves the right to change all prices, hardware, and specifications without notice at any time. U. S. and Foreign patents pending.

Warranty: Satisfaction with the Dutchman Boom Brake is guaranteed if we are informed in writing of any dissatisfaction within One Year of the Date of Purchase. Please note that if the Boom Brake is not working correctly, it is usually a matter of incorrect installation.

The Dutchman Boom Brake is unconditionally guaranteed against defects in materials supplied by MVB Inc. for a period of 5 years. Normal wear to or by the rope is excluded. Defective items must be returned shipping prepaid to MVB Inc. and will be repaired or replaced at the option of MVB Inc. Return of defective products or a claim of dissatisfaction must be accompanied by a letter giving name, address, phone number, copy of original invoice, size, builder, year, name and location of boat, and an explanation of the defect or problem. This warranty does not apply to or include any products which were improperly installed or maintained, nor to any consequential or incidental losses or damages arising from the product or its use. This warranty is in lieu of all other implied, express and statutory guarantees, and in no event shall MVB Inc. be liable for special, incidental, or consequential damages.

Licensing Card

Please fill out and return this licensing card.

This licensing card will help us to provide you with product updates.
Thank you very much, and please tell your friends about our products.

Thank you for you selection of a Dutchman product. Please complete and return this warranty card as soon as possible. Thank you.

I bought a _____ Date _____
Purchased From _____
Make / Size / Year of Boat _____
Name / Home Port of Boat _____
My Name _____
Address _____

Tel. Number _____
Comments _____

